



LB228

BACKHOE LOADER

LB228




BACKHOE LOADER

SPECIFICATION

Operating weight		2280kg
Working device form		Backhoe
Loading bucket capacity		0.27m³
Digging bucket capacity		0.04m³
Engine	Model No.	KUBOTA D1105
	Displacement	1.132L
	Rated power	14.0 KW/2200r/min
	Max. torque	70.3 N.m/1600r/min
Speed and digging force	Max.travel speed	9.2 km/h
	Max. traction force	14 KN
	Max.rising power	800 KG
Hydraulic and liquid capacity	Pump type	Piston pump
	Work pressure	210 Bar
	Flow rate	110 L/min
	Hydraulic oil tank capacity	50 L
	Fuel tank capacity	55 L
Brake system	Driving brake form	Oil clamp disc
	Parking brake form	Manual internal expansion hoof type

OPERATING RANGE

A	Overall length(Standard bucket)	4890mm
B	Wheelbase	1800mm
C	Overall height	2580mm
D	Height of seat to ground	1400mm
E	Departure angle	27.5°
F	Approach angle	46.5°
G	Overall width	1200mm
H	Work distance	410mm
I	Max.unloading angle	53°
J	Dumping height	1720mm
K	Loading height	2315mm
L	Bucket hinge point height	2560mm
M	Overall working height	3000mm
N	Max. horizontal pushing depth	80mm
O	Axis to bucket pin	435mm
P	Max. digging depth	2460mm
Q	Max. vertical digging depth	2070mm
S	Max. digging height	3340mm
T	Max. dumping height	2380mm
U	Max.digging radius at the excavation end	3350mm
V	Min. swing radius at the excavation end	1190mm
R1	Left and right swing angles of excavation end	86°
R2	Corner	37°(40°)
R3	Horizontal passing radius	3075mm
R4	Turning radius	2890mm
R5	Inner turning radius	2000mm

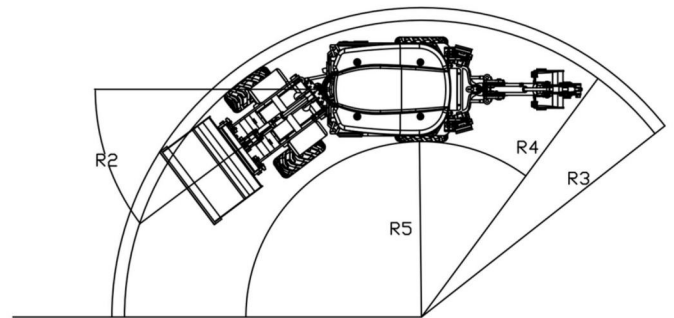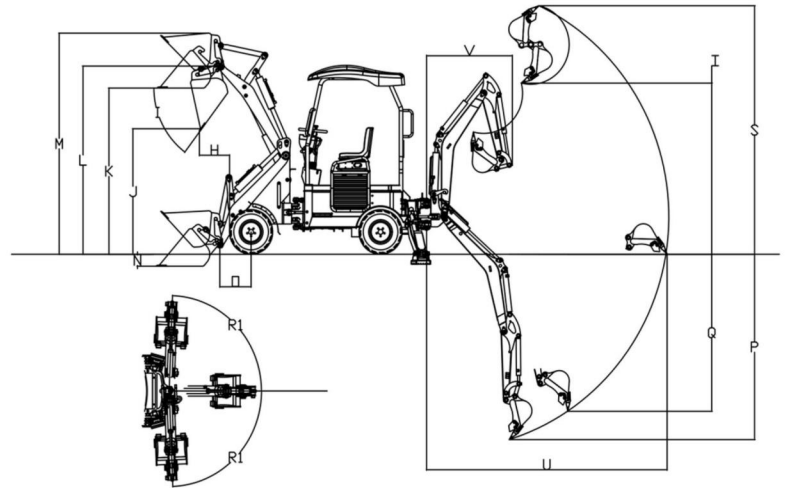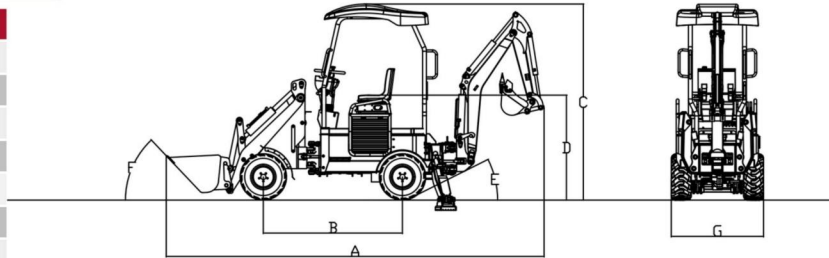

www.keh-machinery.ca



CEH Machinery Trading Ltd.

Address: 131 Oakdale Rd, North York, ON M3N 1W2

Phone: +1 (800) 906-2356

Email: sales@keh-machinery.ca

Website: www.keh-machinery.ca